

Project Name: Fixture Type: Date:


Completed #: E.G. Completed Order #:

Aluminum 5W Essential Uplight

Directional, Integrated Non-Modular, Aluminum - Black, Essential Series Uplight, 5W, 2700K (303 Lm) & 3000K (299 Lm), 10-15V



FINISHES



SPECIFICATIONS

Electrical / Power:
5W / 6.9 VA / 10-15V

Weight:
1.22 lb

Construction / Body:
Aluminum

Dimming:

Lens / Gaskets:

Ambient Operating Temperature:
-4°F- 122°F (-20°C-50°C)

Wiring:
6' Lead Wire


Control:

LED Life:
50,000 Hrs

Warranty:
Housing Warranty: 10 Years; Finish Warranty: 5 Years; LED Warranty: 10 Years

Installation Requirements:
Remote low voltage power supply/transformer required

LED Engine:
Lumens: 303 / CRI: 80+

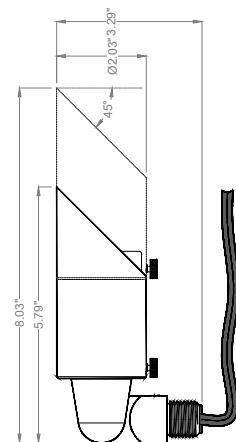

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.




IP65

Project Name:		Fixture Type:		Date:	
Completed #:		E.G. Completed Order #:			

Aluminum 5W Essential Uplight

Product Line Drawings

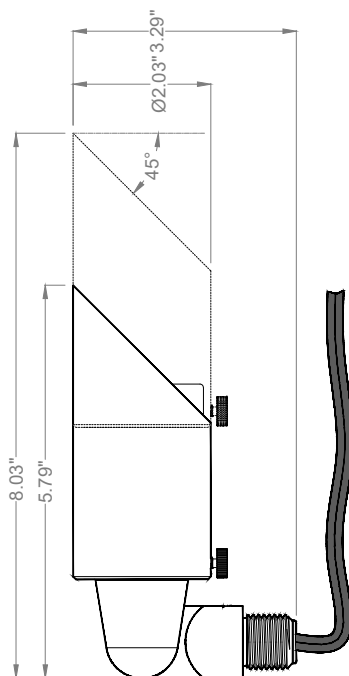

Standard Included Accessories



1/2" Threaded 8" Stake
with ADJ Collar

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Ordering Guide

Instructions: Steps 6–10 continue on the following pages. Please complete the full ordering guide.

01 LED Engine	02 Wattage	03 CCT	04 Spread	05 Finish
	-	-	-	-
D3A2 CORE Series	5W	27K 30K		BK BZ

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Ordering Guide Continued

Instructions: Steps 8-10 continue on the following pages. Please complete the full ordering guide.

07 Mounts

	ASD-MNT-025-(BK/BZ) 1/2" Threaded Single-Point Tree Mount		PSD-STK-8-018 1/2" Threaded 8" Stake with ADJ Collar
	SSSD-STK-12-002 1/2" Threaded 12" Trident Stake with 5" Plate		PSD-STK-15-005 1/2" Threaded 15" Commercial Stake
	SSD-MNT-021-(BK/BZ) 1/2" Threaded Gutter Mount Bracket		SSSD-MNT-005XL-BK 1/2" Threaded Tree Mount, 2.5" X 6"
	SSSD-MNT-005-BK 1/2" Threaded Tree Mount, 1.5" X 4"		SSSD-STK-6-007 1/2" Threaded 6" Trident Stake with 3" Plate
	SSSD-STK-6-003 1/2" Threaded 6" Mini Stake		SSSD-STK-6-002 1/2" Threaded 6" Trident Stake with 5" Plate
	PSD-STK-12-001 1/2" Threaded 12" Stake		ASD-JBX-002-(BK/BZ) 1/2" Threaded J-Box
	ASD-MNT-001-(BK/BZ) 1/2" Threaded Base		

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Ordering Guide Continued

Instructions: Steps 9–10 continue on the following pages. Please complete the full ordering guide.

08 Secondary Mounts

	ASD-MNT-004-(BK/BZ) 1/2" Threaded T-Mount		ASD-MNT-003-(BK/BZ) 1/2" Threaded L-Mount
	ASD-STM-4-020-(BK/BZ) 1/2" Threaded 4" Riser		ASD-STM-ADJ-008-(BK/BZ) 1/2" Threaded ADJ 16-25" Riser
	ASD-STM-24-007-(BK/BZ) 1/2" Threaded 24" Riser		ASD-STM-16-006-(BK/BZ) 1/2" Threaded 16" Riser
	ASD-STM-8-005-(BK/BZ) 1/2" Threaded 8" Riser		


* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name: Fixture Type: Date:
 Completed #: E.G. Completed Order #:


Performance Characteristics & Beam Spread Charts

Input Power	5W
Color Temperature (CCT)	30K
Color Rendering Index (Ra)	80+
Beam Angle	50
Max. Candlepower	576.0 cd
Delivered Lumens	299 lm
Efficacy	60.2 lm/W

POLAR GRAPH - INTENSITY



CONE OF LIGHT - ILLUMINANCE



* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

LED Engine Characteristics

LED Engine	Beam Spread	CCT (K)	CRI	Input Power (W)	RGB	Control	VA	Multiplier for 30K	Delivered Lumens (Lm)
I1-D3A2	50	27K	80+	5W	No		6.9		303
I2-D3A2	50	30K	80+	5W	No		7.3		299

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.