

Project Name: Fixture Type: Date:


Completed #: E.G. Completed Order #:

Aluminum Deco Undercap Hardscape

Wall, Integrated Modular, Aluminum, 6" Adjustable Modular Hardscape with Undercap Mount, 3.5W, Available in Multiple Variations, 10-15V



FINISHES



SPECIFICATIONS

Electrical / Power:
3.5W / 5.4 VA / 10-15V

Weight:
0.99 lb

Construction / Body:
Aluminum

Dimming:
0%-100%

Lens / Gaskets:

Ambient Operating Temperature:
-4°F- 122°F (-20°C-50°C)

Wiring:
6' Lead Wire


Control:
With PRO Remote

LED Life:
50,000 Hrs

Warranty:
Housing Warranty: Lifetime; Finish Warranty: 5 Years; LED Warranty: 10 Years

Installation Requirements:
Remote low voltage power supply/transformer required

LED Engine:
Lumens: 163 / CRI: 80+

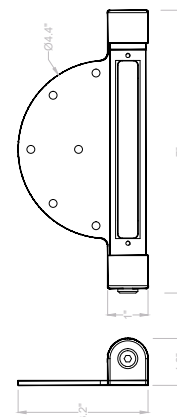

IP65

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:


Date:

Completed #:

E.G. Completed Order #:

Aluminum Deco Undercap Hardscape

Product Line Drawings

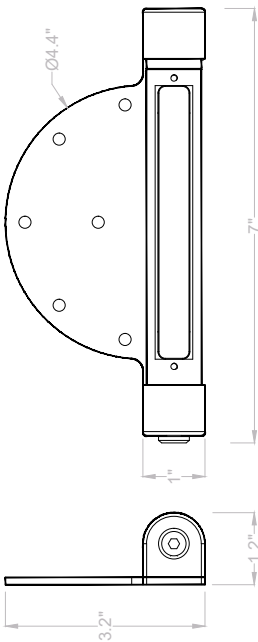

Standard Included Accessories



4mm Allen Key

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Ordering Guide Continued

09 Accessories



ADCO-LVR-197-BZ
Single Louver Glare Shield with Clip-In Hex



ADCO-LVR-197-BK
Single Louver Glare Shield with Clip-In Hex



ADCO-HEX-196-BZ
Hex Louver



ADCO-HEX-196-BK
Hex Louver



REPL-199-RGBTW-BZ
3.5W RGBTW W9A5/W9A6 Hardscape Replacement Module



REPL-199-RGBTW-BK
3.5W RGBTW W9A5/W9A6 Hardscape Replacement Module



REPL-198-TW-BZ
3.5W TW W7A5/W7A6 Hardscape Replacement Module



REPL-198-TW-BK
3.5W TW W7A5/W7A6 Hardscape Replacement Module

10 Power

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Performance Characteristics & Beam Spread Charts

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

LED Engine Characteristics

LED Engine	Beam Spread	CCT (K)	CRI	Input Power (W)	RGB	Control	VA	Multiplier for 30K	Delivered Lumens (Lm)
I-W7A5-W7A6	100°	27K-57K	80+	3.5W	No	With PRO Remote	5.4		163-193
I-RGB-W9A5	100°	27K-57K	80+	3.5W	Yes	With PRO Remote	5.5		27K-57K: 158-192 R: 53, G: 144, B: 31

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.