

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Aluminum Essential 9" Shielded Step

Step, Integrated Non-Modular, Aluminum - Bronze, 9" Shielded, 6W, 100 Lm, 3000K, 10-15V




FINISHES



SPECIFICATIONS

Electrical / Power: 6W / 8.6 VA / 10-15V	Weight: 1.50 lb
Construction / Body: Aluminum	Dimming: 25%-100%
Lens / Gaskets:	Ambient Operating Temperature: -4°F- 122°F (-20°C-50°C)
Wiring: 6' Lead Wire	Control: Primary (MLV/ELV)
LED Life: 50,000 Hrs	Warranty: Housing Warranty: 10 Years; Finish Warranty: 5 Years; LED Warranty: 10 Years
Installation Requirements: Remote low voltage power supply/transformer required	LED Engine: Lumens: 124 / CRI: 80+

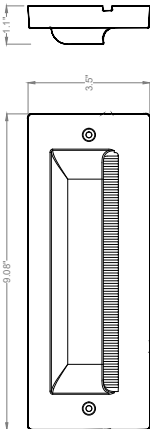

IP65

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:


Date:

Completed #:


E.G. Completed Order #:

Aluminum Essential 9" Shielded Step

Product Line Drawings

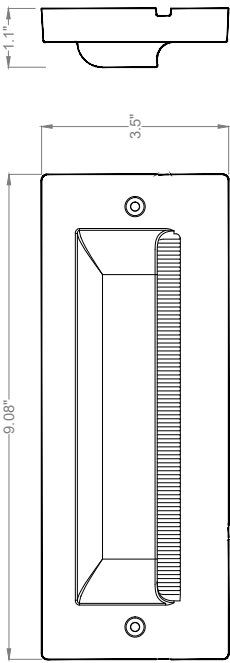

Standard Included Accessories

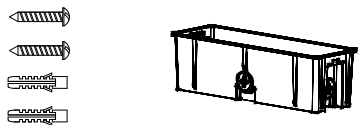

Essential Step J-Box, Large

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Ordering Guide

Instructions: Steps 6–10 continue on the following pages. Please complete the full ordering guide.

01 LED Engine

02 Wattage

03 CCT

04 Spread

05 Finish

-

-

-

-

S3A4

6W

30K

BZ

CORE Series

Project Name:

Fixture Type:

Date:


Completed #:

E.G. Completed Order #:


Performance Characteristics & Beam Spread Charts

Input Power	6W
Color Temperature (CCT)	30K
Color Rendering Index (Ra)	80+
Beam Angle	80°
Max. Candlepower	137.6 cd
Delivered Lumens	124 lm
Efficacy	21.6 lm/W

POLAR GRAPH - INTENSITY



CONE OF LIGHT - ILLUMINANCE



* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

LED Engine Characteristics

LED Engine	Beam Spread	CCT (K)	CRI	Input Power (W)	RGB	Control	VA	Multiplier for 30K	Delivered Lumens (Lm)
I1-S3A4	80°	30K	80+	6W	No	Primary (MLV/ELV)	8.6		124

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.