

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Aluminum Essential Down Sconce

Wall, Integrated Non-Modular, Aluminum, Downlight Sconce, 10W, 816 Lm, 3000K, 10-15V



FINISHES



SPECIFICATIONS

Electrical / Power:
10W / 12.1 VA / 10-15V

Weight:
1.20 lb

Construction / Body:
Aluminum

Dimming:
25%-100%

Lens / Gaskets:

Ambient Operating Temperature:
-4°F- 122°F (-20°C-50°C)

Wiring:
6' Lead Wire


Control:
Primary (MLV)

LED Life:
50,000 Hrs

Warranty:
Housing Warranty: Lifetime; Finish Warranty: 5 Years; LED Warranty: 10 Years

Installation Requirements:
Remote low voltage power supply/transformer required

LED Engine:
Lumens: 815 / CRI: 80+



* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:


Date:

Completed #:

E.G. Completed Order #:

Aluminum Essential Down Sconce

Product Line Drawings

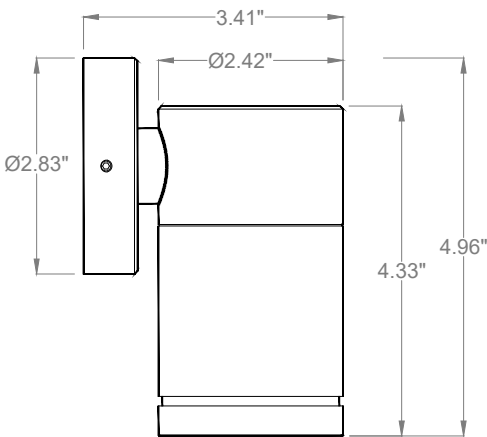

Standard Included Accessories



* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Ordering Guide

Instructions: Steps 6–10 continue on the following pages. Please complete the full ordering guide.

01 LED Engine

02 Wattage

03 CCT

04 Spread

05 Finish

-

-

-

-

W3A2

10W

30K

BZ

CORE Series

Project Name:

Fixture Type:

Date:


Completed #:

E.G. Completed Order #:


Performance Characteristics & Beam Spread Charts

Input Power	10W
Color Temperature (CCT)	30K
Color Rendering Index (Ra)	80+
Beam Angle	80°
Max. Candlepower	529.7 cd
Delivered Lumens	815 lm
Efficacy	94.4 lm/W

POLAR GRAPH - INTENSITY



CONE OF LIGHT - ILLUMINANCE



* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

LED Engine Characteristics

LED Engine	Beam Spread	CCT (K)	CRI	Input Power (W)	RGB	Control	VA	Multiplier for 30K	Delivered Lumens (Lm)
I1-W3A2	80°	30K	80+	10W	No	Primary (MLV)	12.1		815

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.