

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Aluminum Essential L-Shape

Area, Integrated Non-Modular, Aluminum, L-Shape, 6W, Available in Multiple Variations, 10-15V




FINISHES



SPECIFICATIONS

Electrical / Power: 6W / 9.4 VA / 10-15V	Weight: 2.19 lb
Construction / Body: Aluminum	Dimming: 25%-100%
Lens / Gaskets:	Ambient Operating Temperature: -4°F- 122°F (-20°C-50°C)
Wiring: 6' Lead Wire	Control: Primary (MLV)
LED Life: 50,000 Hrs	Warranty: Housing Warranty: 10 Years; Finish Warranty: 5 Years; LED Warranty: 10 Years
Installation Requirements: Remote low voltage power supply/transformer required	LED Engine: Lumens: 515 / CRI: 80+

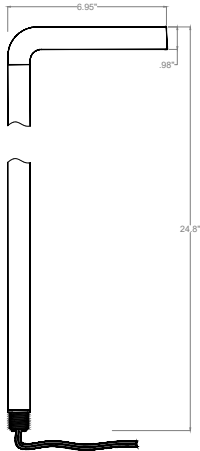

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:


Date:

Completed #:

E.G. Completed Order #:

Aluminum Essential L-Shape

Product Line Drawings

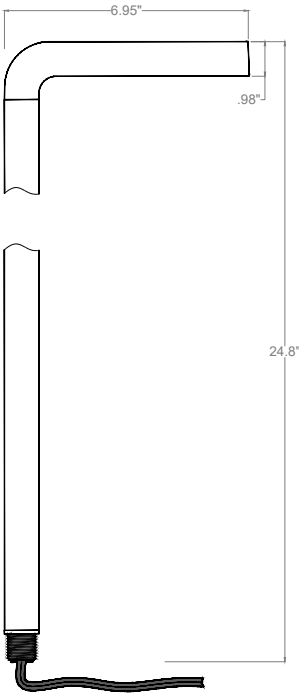

Standard Included Accessories



1/2" Threaded 8" Stake
with ADJ Collar

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Ordering Guide Continued

Instructions: Steps 8–10 continue on the following pages. Please complete the full ordering guide.

07 Mounts

	SSSD-STK-6-003 1/2" Threaded 6" Mini Stake		SSSD-STK-6-002 1/2" Threaded 6" Trident Stake with 5" Plate
	PSD-STK-12-001 1/2" Threaded 12" Stake		SSSD-STK-6-007 1/2" Threaded 6" Trident Stake with 3" Plate
	PSD-STK-8-018 1/2" Threaded 8" Stake with ADJ Collar		SSSD-STK-12-002 1/2" Threaded 12" Trident Stake with 5" Plate
	PSD-STK-15-005 1/2" Threaded 15" Commercial Stake		ASD-JBX-002-(BK/BZ) 1/2" Threaded J-Box
	ASD-MNT-001-(BK/BZ) 1/2" Threaded Base		

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:


Completed #:

E.G. Completed Order #:


Performance Characteristics & Beam Spread Charts

Input Power	6W
Color Temperature (CCT)	30K
Color Rendering Index (Ra)	80+
Beam Angle	80°
Max. Candlepower	290.1 cd
Delivered Lumens	535 lm
Efficacy	89.3 lm/W

POLAR GRAPH - INTENSITY



CONE OF LIGHT - ILLUMINANCE



* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

LED Engine Characteristics

LED Engine	Beam Spread	CCT (K)	CRI	Input Power (W)	RGB	Control	VA	Multiplier for 30K	Delivered Lumens (Lm)
I1-A3A3	80°	27K	80+	6W	No	Primary (MLV)	9.4		515
I2-A3A3	80°	30K	80+	6W	No	Primary (MLV)	9.4		535
I-RGB-A9A3	80°	27K-57K	80+	6W	Yes	With PRO Remote	9.1		27K-57K: 324-360 R: 139, G: 290, B: 77

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.