

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Aluminum Essential Short Pendant

Pendant, Integrated Non-Modular, Aluminum - Bronze, 4.5" Short Shroud, 5W, 350 Lm, 3000K, 10-15V



FINISHES



Bronze

SPECIFICATIONS

Electrical / Power:
5W / 6.9 VA / 10-15V

Weight:
0.72 lb

Construction / Body:
Aluminum

Dimming:
25%-100%

Lens / Gaskets:

Ambient Operating Temperature:
-4°F- 122°F (-20°C-50°C)

Wiring:
6' Lead Wire


Control:
Primary (MLV)

LED Life:
50,000 Hrs

Warranty:
Housing Warranty: 10 Years; Finish Warranty: 5 Years; LED Warranty: 10 Years

Installation Requirements:
Remote low voltage power supply/transformer required

LED Engine:
Lumens: 406 / CRI: 80+

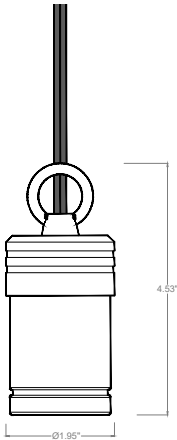

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:


Date:

Completed #:

E.G. Completed Order #:

Aluminum Essential Short Pendant

Product Line Drawings

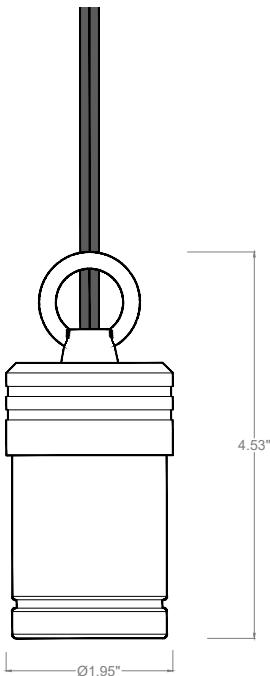

Standard Included Accessories

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Ordering Guide

Instructions: Steps 6–10 continue on the following pages. Please complete the full ordering guide.

01 LED Engine

02 Wattage

03 CCT

04 Spread

05 Finish

-

-

-

-

P3A1

5W

30K

BZ

CORE Series

Project Name:

Fixture Type:

Date:


Completed #:

E.G. Completed Order #:


Performance Characteristics & Beam Spread Charts

Input Power	5W
Color Temperature (CCT)	30K
Color Rendering Index (Ra)	80+
Beam Angle	50°
Max. Candlepower	538.6 cd
Delivered Lumens	406 lm
Efficacy	84.2 lm/W

POLAR GRAPH - INTENSITY



CONE OF LIGHT - ILLUMINANCE



* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

LED Engine Characteristics

LED Engine	Beam Spread	CCT (K)	CRI	Input Power (W)	RGB	Control	VA	Multiplier for 30K	Delivered Lumens (Lm)
I1-P3A1	50°	30K	80+	5W	No	Primary (MLV)	6.9		406

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.