

Project Name: Fixture Type: Date:

Completed #: E.G. Completed Order #:

Aluminum Essential Swivel Puck

Area, Integrated Non-Modular, Aluminum, Swivel Puck, 12W, 2700K (775 Lm) & 3000K (804 Lm), 10-15V



FINISHES



SPECIFICATIONS

Electrical / Power:
12W / 16.0 VA / 10-15V

Weight:
1.84 lb

Construction / Body:
Aluminum

Dimming:
25%-100%

Lens / Gaskets:

Ambient Operating Temperature:
-4°F- 122°F (-20°C-50°C)

Wiring:
6' Lead Wire


Control:
Primary (MLV)

LED Life:
50,000 Hrs

Warranty:
Housing Warranty: 10 Years; Finish Warranty: 5 Years; LED Warranty: 10 Years

Installation Requirements:
Remote low voltage power supply/transformer required

LED Engine:
Lumens: 775 / CRI: 80+



IP65

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:


Date:

Completed #:

E.G. Completed Order #:

Aluminum Essential Swivel Puck

Product Line Drawings

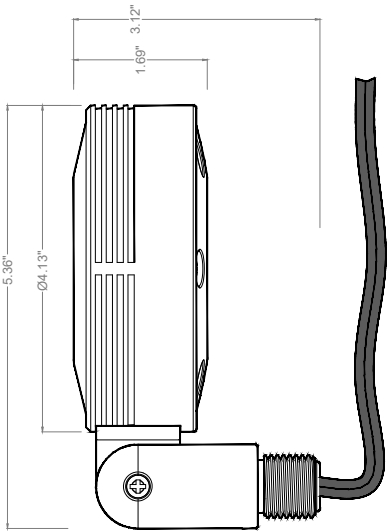

Standard Included Accessories



1/2" Threaded 8" Stake
with ADJ Collar

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Ordering Guide

Instructions: Steps 6–10 continue on the following pages. Please complete the full ordering guide.

01 LED Engine

02 Wattage

03 CCT

04 Spread

05 Finish

A3A4

12W

27K

BZ

CORE Series

30K

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Ordering Guide Continued

Instructions: Steps 8-10 continue on the following pages. Please complete the full ordering guide.

07 Mounts

	PSD-STK-8-018 1/2" Threaded 8" Stake with ADJ Collar		SSSD-STK-12-002 1/2" Threaded 12" Trident Stake with 5" Plate
	PSD-STK-15-005 1/2" Threaded 15" Commercial Stake		ASD-MNT-025-(BK/BZ) 1/2" Threaded Single-Point Tree Mount
	SSSD-STK-6-007 1/2" Threaded 6" Trident Stake with 3" Plate		SSSD-STK-6-003 1/2" Threaded 6" Mini Stake
	SSSD-STK-6-002 1/2" Threaded 6" Trident Stake with 5" Plate		PSD-STK-12-001 1/2" Threaded 12" Stake
	ASD-JBX-002-(BK/BZ) 1/2" Threaded J-Box		ASD-MNT-001-(BK/BZ) 1/2" Threaded Base

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:


Completed #:

E.G. Completed Order #:


Performance Characteristics & Beam Spread Charts

Input Power	12W
Color Temperature (CCT)	30K
Color Rendering Index (Ra)	80+
Beam Angle	80°
Max. Candlepower	467.9 cd
Delivered Lumens	804 lm
Efficacy	74.4 lm/W

POLAR GRAPH - INTENSITY



CONE OF LIGHT - ILLUMINANCE



* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

LED Engine Characteristics

LED Engine	Beam Spread	CCT (K)	CRI	Input Power (W)	RGB	Control	VA	Multiplier for 30K	Delivered Lumens (Lm)
I1-A3A4	80°	27K	80+	12W	No	Primary (MLV)	16.0		775
I2-A3A4	80°	30K	80+	12W	No	Primary (MLV)	14.7		804

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.