

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Aluminum Essential Up/Down Sconce

Wall, Integrated Non-Modular, Aluminum, Up/Down Sconce, (2) 10W, 825 Lm, 3000K, 10-15V




FINISHES



SPECIFICATIONS

Electrical / Power: 10W / VA / 10-15V	Weight: 1.65 lb
Construction / Body: Aluminum	Dimming: 25%-100%
Lens / Gaskets:	Ambient Operating Temperature: -4°F- 122°F (-20°C-50°C)
Wiring: 6' Lead Wire	Control: Primary (MLV)
LED Life: 50,000 Hrs	Warranty: Housing Warranty: Lifetime; Finish Warranty: 5 Years; LED Warranty: 10 Years
Installation Requirements: Remote low voltage power supply/transformer required	LED Engine: Lumens: / CRI: 80+

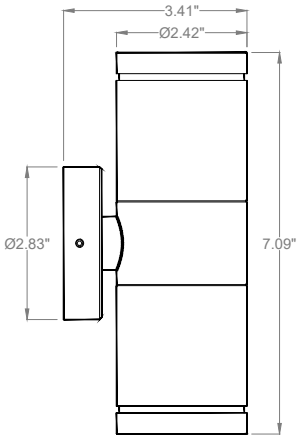

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.



Project Name:

Fixture Type:


Date:

Completed #:

E.G. Completed Order #:

Aluminum Essential Up/Down Sconce

Product Line Drawings

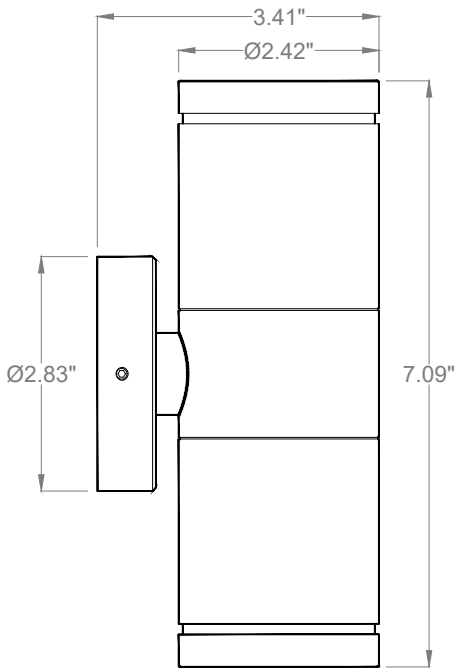

Standard Included Accessories



* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Ordering Guide

Instructions: Steps 6–10 continue on the following pages. Please complete the full ordering guide.

01 LED Engine

02 Wattage

03 CCT

04 Spread

05 Finish

-

-

-

-

W3A3

10W

30K

BZ

CORE Series

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

LED Engine Characteristics

LED Engine	Beam Spread	CCT (K)	CRI	Input Power (W)	RGB	Control	VA	Multiplier for 30K	Delivered Lumens (Lm)
I2-W3A3	(2) 80°	30K	80+	10W	No	Primary (MLV)			

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.