

Project Name: Fixture Type: Date:

Completed #: E.G. Completed Order #:

Aluminum Integrated Bubble Hat

Area, Integrated Variable, Aluminum, Bubble Hat, 4W, 74-189 Lm, 2700K & 3000K, 10-15V



FINISHES



SPECIFICATIONS

Electrical / Power:
4W / 5.9 VA / 10-15V

Weight:
1.74 lb

Construction / Body:
Aluminum

Dimming:
25%-100%

Lens / Gaskets:

Ambient Operating Temperature:
-4°F- 122°F (-20°C-50°C)

Wiring:
6' Lead Wire


Control:
Primary (MLV)

LED Life:
50,000 Hrs

Warranty:
Housing Warranty: 10 Years; Finish Warranty: 5 Years; LED Warranty: 10 Years

Installation Requirements:
Remote low voltage power supply/transformer required

LED Engine:
Lumens: 189 / CRI: 80+

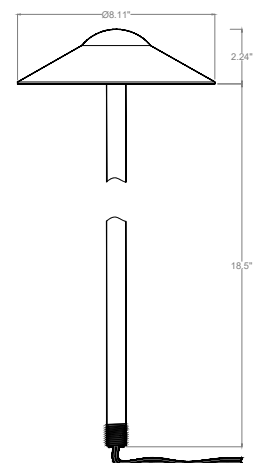

IP65

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:


Date:

Completed #:

E.G. Completed Order #:

Aluminum Integrated Bubble Hat

Product Line Drawings

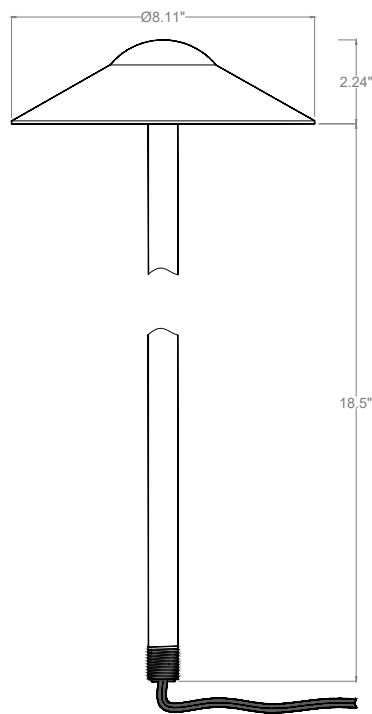

Standard Included Accessories



1/2" Threaded 8" Stake
with ADJ Collar

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Ordering Guide

Instructions: Steps 6–10 continue on the following pages. Please complete the full ordering guide.

01 LED Engine	02 Wattage	03 CCT	04 Spread	05 Finish
	-	-	-	-
A5A2 CORE Series	4W	27K 30K		BZ

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Ordering Guide Continued

Instructions: Steps 8-10 continue on the following pages. Please complete the full ordering guide.

07 Mounts

	SSSD-STK-12-002 1/2" Threaded 12" Trident Stake with 5" Plate		PSD-STK-15-005 1/2" Threaded 15" Commercial Stake
	SSSD-STK-6-007 1/2" Threaded 6" Trident Stake with 3" Plate		SSSD-STK-6-003 1/2" Threaded 6" Mini Stake
	SSSD-STK-6-002 1/2" Threaded 6" Trident Stake with 5" Plate		PSD-STK-12-001 1/2" Threaded 12" Stake
	ASD-JBX-002-(BK/BZ) 1/2" Threaded J-Box		ASD-MNT-001-(BK/BZ) 1/2" Threaded Base

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:


Completed #:

E.G. Completed Order #:


Performance Characteristics & Beam Spread Charts

Input Power	4W
Color Temperature (CCT)	30K
Color Rendering Index (Ra)	80+
Beam Angle	60
Max. Candlepower	67.9 cd
Delivered Lumens	75 lm
Efficacy	19.0 lm/W

POLAR GRAPH - INTENSITY



CONE OF LIGHT - ILLUMINANCE



* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

LED Engine Characteristics

LED Engine	Beam Spread	CCT (K)	CRI	Input Power (W)	RGB	Control	VA	Multiplier for 30K	Delivered Lumens (Lm)
I1-A5A2	120	27K	80+	4W	No	Primary (MLV)	5.9		189
I2-A5A2	60	27K	80+	4W	No	Primary (MLV)	5.9		74
I3-A5A2	120	30K	80+	4W	No	Primary (MLV)	5.8		189
I4-A5A2	60	30K	80+	4W	No	Primary (MLV)	5.8		75

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.