

Project Name: Fixture Type: Date:

Completed #: E.G. Completed Order #:

Aluminum Integrated Flat Top Dome Hat

Area, Integrated Variable, Aluminum, Flat Top Dome Hat, 4W, 75-174 Lm, 2700K & 3000K, 10-15V



FINISHES



SPECIFICATIONS

Electrical / Power:
4W / 6.0 VA / 10-15V

Weight:
1.74 lb

Construction / Body:
Aluminum

Dimming:
25%-100%

Lens / Gaskets:

Ambient Operating Temperature:
-4°F- 122°F (-20°C-50°C)

Wiring:
6' Lead Wire


Control:
Primary (MLV)

LED Life:
50,000 Hrs

Warranty:
Housing Warranty: 10 Years; Finish Warranty: 5 Years; LED Warranty: 10 Years

Installation Requirements:
Remote low voltage power supply/transformer required

LED Engine:
Lumens: 174 / CRI: 80+

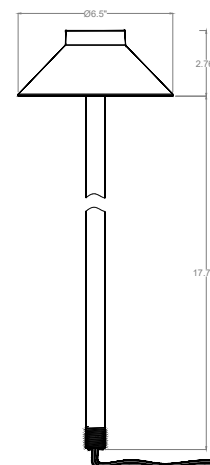

IP65

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:


Date:

Completed #:

E.G. Completed Order #:

Aluminum Integrated Flat Top Dome Hat

Product Line Drawings

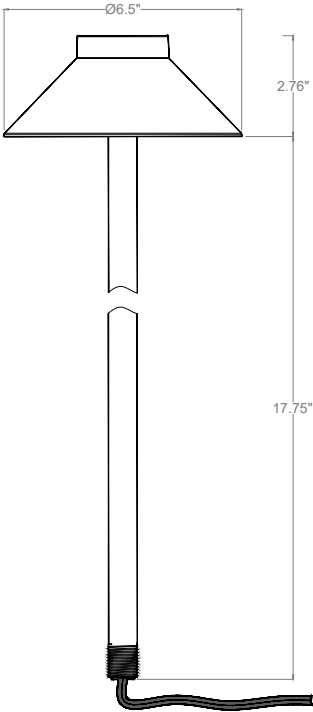

Standard Included Accessories



1/2" Threaded 8" Stake
with ADJ Collar

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Ordering Guide

Instructions: Steps 6–10 continue on the following pages. Please complete the full ordering guide.

01 LED Engine	02 Wattage	03 CCT	04 Spread	05 Finish
A5A4 CORE Series	4W	27K 30K		BK BZ

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Ordering Guide Continued

Instructions: Steps 8-10 continue on the following pages. Please complete the full ordering guide.

07 Mounts

	SSSD-STK-12-002 1/2" Threaded 12" Trident Stake with 5" Plate		PSD-STK-15-005 1/2" Threaded 15" Commercial Stake
	SSSD-STK-6-007 1/2" Threaded 6" Trident Stake with 3" Plate		SSSD-STK-6-003 1/2" Threaded 6" Mini Stake
	SSSD-STK-6-002 1/2" Threaded 6" Trident Stake with 5" Plate		PSD-STK-12-001 1/2" Threaded 12" Stake
	ASD-JBX-002-(BK/BZ) 1/2" Threaded J-Box		ASD-MNT-001-(BK/BZ) 1/2" Threaded Base

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:


Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Performance Characteristics & Beam Spread Charts

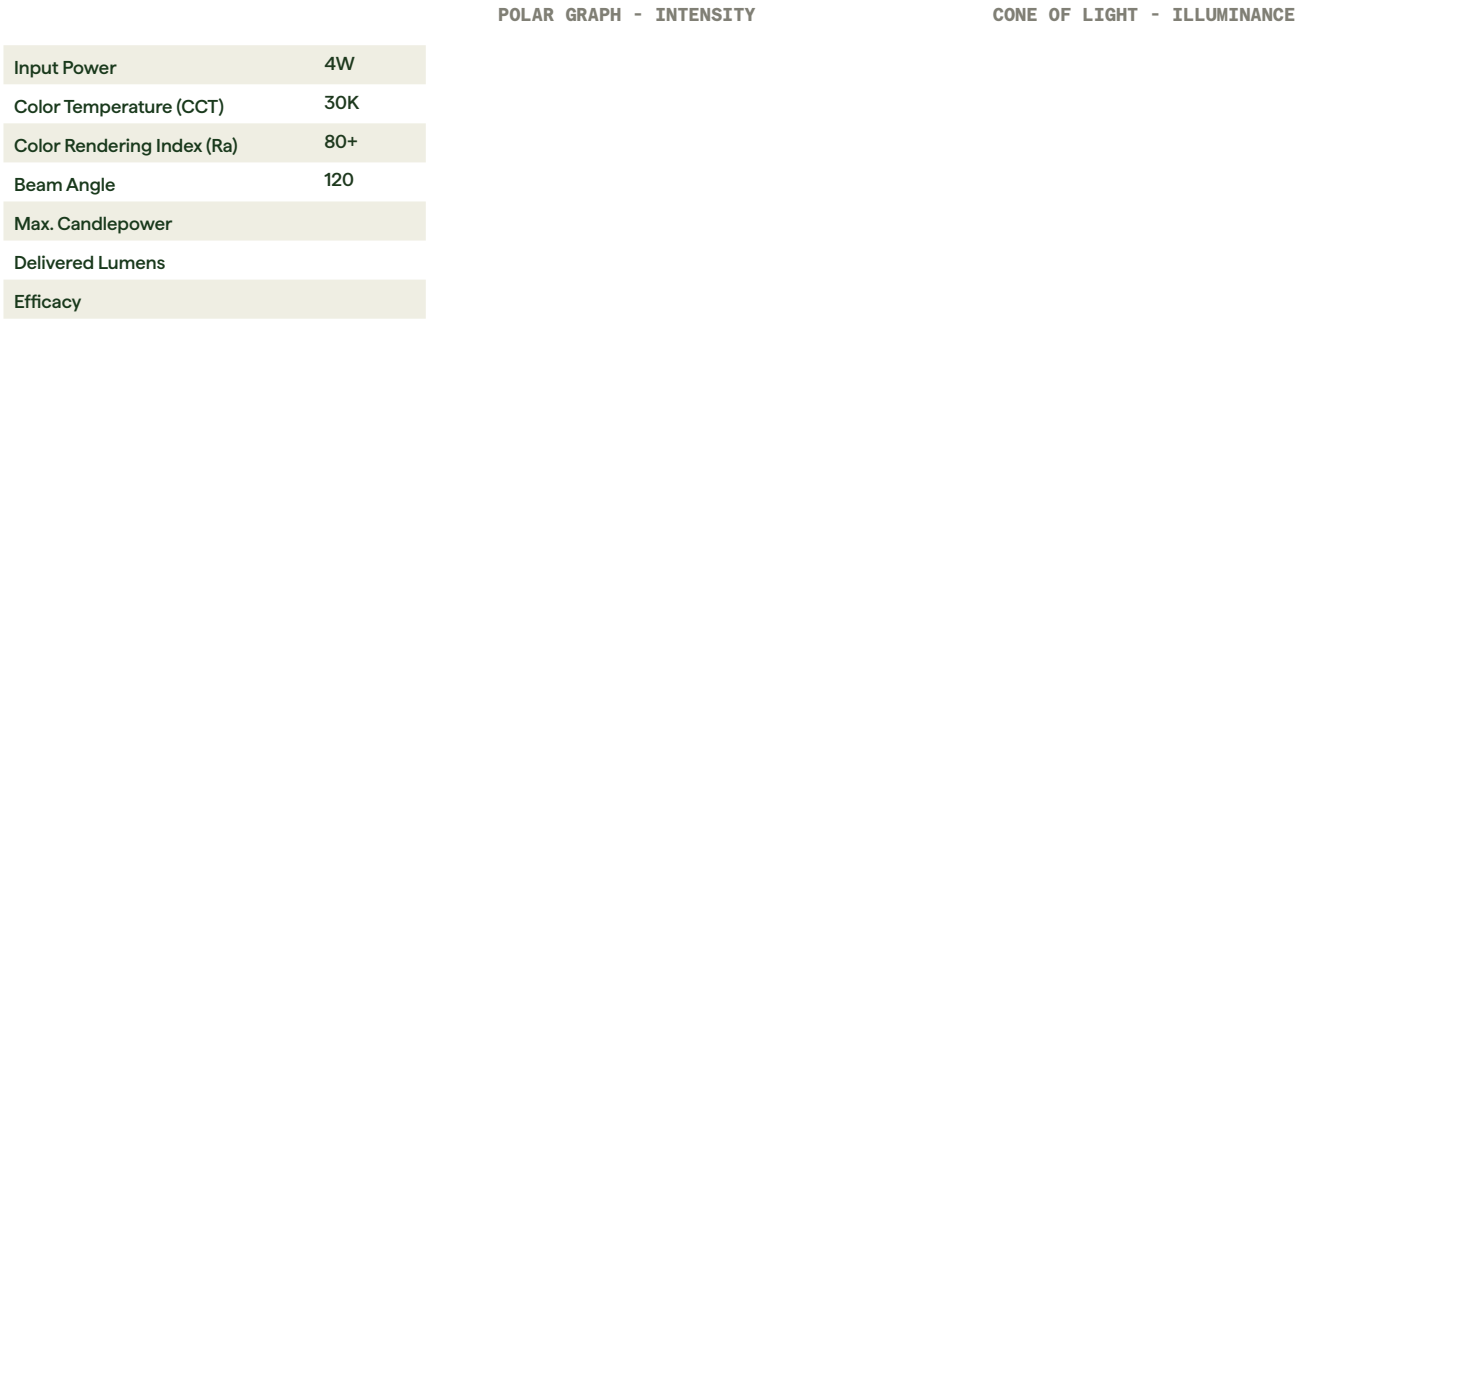

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

LED Engine Characteristics

LED Engine	Beam Spread	CCT (K)	CRI	Input Power (W)	RGB	Control	VA	Multiplier for 30K	Delivered Lumens (Lm)
I1-A5A4	120	27K	80+	4W	No	Primary (MLV)	6.0		75
I2-A5A4	60	27K	80+	4W	No	Primary (MLV)	6.0		174
I3-A5A4	120	30K	80+	4W	No	Primary (MLV)			
I4-A5A4	60	30K	80+	4W	No	Primary (MLV)			

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.