

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Aluminum Integrated Flood

Flood, Integrated Variable - Standard Dimming, Aluminum, Deco Aluminum Series Floodlight (Includes 60° Optic), Available in Multiple Variations, 10-15V




FINISHES



SPECIFICATIONS

Electrical / Power: 15W / 15.1 VA / 10-15V	Weight: 2.72 lb
Construction / Body: Aluminum	Dimming: 25%-100%
Lens / Gaskets: 60° Lens Included	Ambient Operating Temperature: -4°F- 122°F (-20°C-50°C)
Wiring: 6' Lead Wire	Control: Primary (MLV/ELV)
LED Life: 50,000 Hrs	Warranty: Housing Warranty: 10 Years; Finish Warranty: 5 Years; LED Warranty: 10 Years
Installation Requirements: Remote low voltage power supply/transformer required	LED Engine: Lumens: 747 / CRI: 80+



* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.



Project Name:

Fixture Type:


Date:

Completed #:


E.G. Completed Order #:

Aluminum Integrated Flood

Product Line Drawings

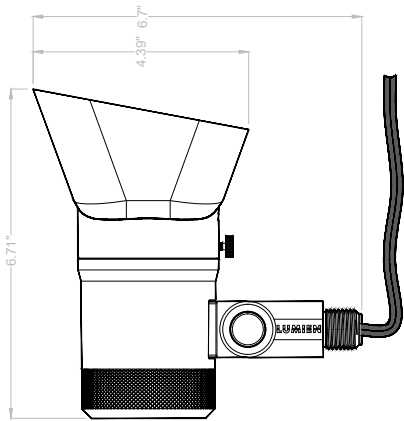

Standard Included Accessories

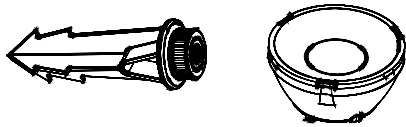

1/2" Threaded 8" Stake
with ADJ Collar

Deco/Macro, 60° Optic
Lens

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Ordering Guide Continued

Instructions: Steps 8-10 continue on the following pages. Please complete the full ordering guide.

07 Mounts

	SSSD-STK-12-002 1/2" Threaded 12" Trident Stake with 5" Plate		PSD-STK-15-005 1/2" Threaded 15" Commercial Stake
	ASD-MNT-025-(BK/BZ) 1/2" Threaded Single-Point Tree Mount		SSSD-MNT-005-BK 1/2" Threaded Tree Mount, 1.5" X 4"
	SSSD-MNT-005XL-BK 1/2" Threaded Tree Mount, 2.5" X 6"		SSSD-STK-6-007 1/2" Threaded 6" Trident Stake with 3" Plate
	SSSD-STK-6-003 1/2" Threaded 6" Mini Stake		SSSD-STK-6-002 1/2" Threaded 6" Trident Stake with 5" Plate
	PSD-STK-12-001 1/2" Threaded 12" Stake		ASD-JBX-002-(BK/BZ) 1/2" Threaded J-Box
	ASD-MNT-001-(BK/BZ) 1/2" Threaded Base		SSD-MNT-021-(BK/BZ) 1/2" Threaded Gutter Mount Bracket
	PSD-STK-8-018 1/2" Threaded 8" Stake with ADJ Collar		

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Ordering Guide Continued

Instructions: Steps 9–10 continue on the following pages. Please complete the full ordering guide.

08 Secondary Mounts

	ASD-MNT-004-(BK/BZ) 1/2" Threaded T-Mount		ASD-MNT-003-(BK/BZ) 1/2" Threaded L-Mount
	ASD-STM-4-020-(BK/BZ) 1/2" Threaded 4" Riser		ASD-STM-ADJ-008-(BK/BZ) 1/2" Threaded ADJ 16-25" Riser
	ASD-STM-24-007-(BK/BZ) 1/2" Threaded 24" Riser		ASD-STM-16-006-(BK/BZ) 1/2" Threaded 16" Riser
	ASD-STM-8-005-(BK/BZ) 1/2" Threaded 8" Riser		

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Ordering Guide Continued

09 Accessories



PDZ-OPT-ASYM-016
Deco/Macro Asymmetrical Lens



PDZ-OPT-80-013
Deco/Macro, 80° Optic Lens

GDCO-OPT-005-MV
Mercury Vapor Lens for Deco Series

10 Power

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:


Completed #:

E.G. Completed Order #:


Performance Characteristics & Beam Spread Charts

Input Power	15W
Color Temperature (CCT)	30K
Color Rendering Index (Ra)	80+
Beam Angle	60
Max. Candlepower	518.0 cd
Delivered Lumens	685 lm
Efficacy	51.1 lm/W

POLAR GRAPH - INTENSITY



CONE OF LIGHT - ILLUMINANCE



* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

