

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Aluminum Integrated Uplight

Directional, Integrated Variable - Standard Dimming, Aluminum, Deco Aluminum Series Uplight (Includes 40° Optic & Hex Louver), Available in Multiple Variations, 10-15V



FINISHES



SPECIFICATIONS

Electrical / Power:
15W / 14.6 VA / 10-15V

Weight:
2.26 lb

Construction / Body:
Aluminum

Dimming:
25%-100%

Lens / Gaskets:
40° Lens Included

Ambient Operating Temperature:
-4°F- 122°F (-20°C-50°C)

Wiring:
6' Lead Wire


Control:
Primary (MLV/ELV)

LED Life:
50,000 Hrs

Warranty:
Housing Warranty: 10 Years; Finish Warranty: 5 Years; LED Warranty: 10 Years

Installation Requirements:
Remote low voltage power supply/transformer required

LED Engine:
Lumens: 1101 / CRI: 80+



* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:


Date:

Completed #:

E.G. Completed Order #:

Aluminum Integrated Uplight


Product Line Drawings

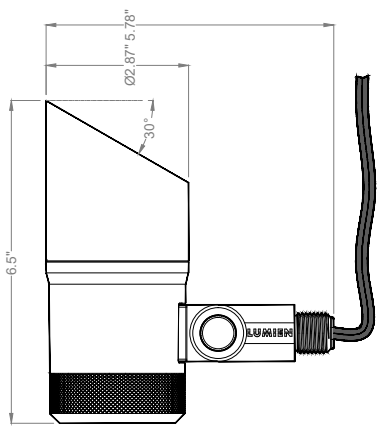


Standard Included Accessories



1/2" Threaded 8" Stake
with ADJ Collar



Deco/Macro, 40° Optic
Lens



Banded Hex Louver for
Deco Series

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Ordering Guide Continued

Instructions: Steps 8-10 continue on the following pages. Please complete the full ordering guide.

07 Mounts

	ASD-MNT-025-(BK/BZ) 1/2" Threaded Single-Point Tree Mount		PSD-STK-8-018 1/2" Threaded 8" Stake with ADJ Collar
	SSSD-STK-12-002 1/2" Threaded 12" Trident Stake with 5" Plate		PSD-STK-15-005 1/2" Threaded 15" Commercial Stake
	SSD-MNT-021-(BK/BZ) 1/2" Threaded Gutter Mount Bracket		SSSD-MNT-005XL-BK 1/2" Threaded Tree Mount, 2.5" X 6"
	SSSD-MNT-005-BK 1/2" Threaded Tree Mount, 1.5" X 4"		SSSD-STK-6-007 1/2" Threaded 6" Trident Stake with 3" Plate
	SSSD-STK-6-003 1/2" Threaded 6" Mini Stake		SSSD-STK-6-002 1/2" Threaded 6" Trident Stake with 5" Plate
	PSD-STK-12-001 1/2" Threaded 12" Stake		ASD-JBX-002-(BK/BZ) 1/2" Threaded J-Box
	ASD-MNT-001-(BK/BZ) 1/2" Threaded Base		

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Ordering Guide Continued

Instructions: Steps 9–10 continue on the following pages. Please complete the full ordering guide.

08 Secondary Mounts

	ASD-MNT-004-(BK/BZ) 1/2" Threaded T-Mount		ASD-MNT-003-(BK/BZ) 1/2" Threaded L-Mount
	ASD-STM-4-020-(BK/BZ) 1/2" Threaded 4" Riser		ASD-STM-ADJ-008-(BK/BZ) 1/2" Threaded ADJ 16-25" Riser
	ASD-STM-24-007-(BK/BZ) 1/2" Threaded 24" Riser		ASD-STM-16-006-(BK/BZ) 1/2" Threaded 16" Riser
	ASD-STM-8-005-(BK/BZ) 1/2" Threaded 8" Riser		

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Ordering Guide Continued

09 Accessories

	PDZ-OPT-ASYM-016 Deco/Macro Asymmetrical Lens		PDZ-OPT-80-013 Deco/Macro, 80° Optic Lens
	PDZ-OPT-60-012 Deco/Macro, 60° Optic Lens	GDCO-OPT-005-MV Mercury Vapor Lens for Deco Series	
	PDZ-OPT-15-010 Deco/Macro, 15° Optic Lens		

10 Power

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:


Completed #:

E.G. Completed Order #:


Performance Characteristics & Beam Spread Charts

Input Power	15W
Color Temperature (CCT)	30K
Color Rendering Index (Ra)	80+
Beam Angle	40
Max. Candlepower	2,618.0 cd
Delivered Lumens	1106 lm
Efficacy	83.0 lm/W

POLAR GRAPH - INTENSITY



CONE OF LIGHT - ILLUMINANCE



* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

