

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Aluminum Micro Module

Micro, Integrated Modular, Aluminum, Compatible with Aluminum Micro Drop In Series, Available in Multiple Variations, 10-15V



FINISHES



Black

SPECIFICATIONS

Electrical / Power:
3.5W / 5.0 VA / 10-15V

Weight:
0.50 lb

Construction / Body:
Aluminum

Dimming:
25%-100%

Lens / Gaskets:
2 Rubber O-rings Included

Ambient Operating Temperature:
-4°F- 122°F (-20°C-50°C)

Wiring:
6' Lead Wire


Control:
Primary (MLV/ELV)

LED Life:
50,000 Hrs

Warranty:
Housing Warranty: 10 Years; Finish Warranty: 5 Years; LED Warranty: 10 Years

Installation Requirements:
Remote low voltage power supply/transformer required

LED Engine:
Lumens: 315 / CRI: 80+



* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:


Date:

Completed #:

E.G. Completed Order #:

Aluminum Micro Module

Product Line Drawings

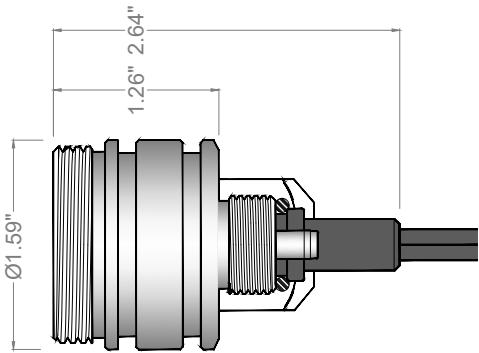

Standard Included Accessories



* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Ordering Guide

Instructions: Steps 6–10 continue on the following pages. Please complete the full ordering guide.

LumienLighting.com
REV 09042026

Performance Characteristics & Beam Spread Charts

	Flare out 200:1 in		
1m	483.2,719.61x		71.46cm
2m	120.8,179.81x		143.46cm
3m	53.69,79.31x		215.35cm
4m	30.20,44.961x		287.37cm
5m	19.33,28.771x		359.21cm
6m	13.42,19.961x		431.05cm
7m	9.861,14.681x		502.89cm
8m	7.549,11.241x		574.74cm
9m	5.965,8.811x		646.58cm
10m	4.832,7.1941x		718.40cm
Height	Base, Apex	Angle is 39.52deg	Diameter

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

LED Engine Characteristics

LED Engine	Beam Spread	CCT (K)	CRI	Input Power (W)	RGB	Control	VA	Multiplier for 30K	Delivered Lumens (Lm)
I1-M4A1-M4B1	40	27K	80+	3.5W	No	Primary (MLV/ELV)	5.0		315
I3-M4A1-M4B1	60	27K	80+	3.5W	No	Primary (MLV/ELV)	5.8		317
I5-M4A1-M4B1	40	27K	80+	5.5W	No	Primary (MLV/ELV)	8.3		427
I7-M4A1-M4B1	60	27K	80+	5.5W	No	Primary (MLV/ELV)	8.6		420
I-M7A1-M7B1	40	27K-57K	80+	4.5W	No	With PRO Remote	5.5		290-351
I2-M4A1-M4B1	40	30K	80+	3.5W	No	Primary (MLV/ELV)	5.2		326
I4-M4A1-M4B1	60	30K	80+	3.5W	No	Primary (MLV/ELV)	5.2		325
I6-M4A1-M4B1	40	30K	80+	5.5W	No	Primary (MLV/ELV)	8.5		472
I8-M4A1-M4B1	60	30K	80+	5.5W	No	Primary (MLV/ELV)	8.4		434
I-RGB-M8A1	40	27K	80+	3W	Yes	With PRO Remote	4.0		27K: 129 R: 56, G: 144, B: 43
I-RGB-M8A1	40	30K	80+	3W	Yes	With PRO Remote	4.8		30K: 141 R: 59, G: 143, B: 44

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.