

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Brass ADJ Beam Deco Path

Area, Integrated Modular Variable, Brass, 18" Riser with Module/ADJ Beam Spread, Available in Multiple Variations, 10-15V



FINISHES



Antique

SPECIFICATIONS

Electrical / Power:  
4W / 5.2 VA / 10-15V

Weight:  
2.35 lb

Construction / Body:  
Brass

Dimming:  
25%-100%

Lens / Gaskets:

Ambient Operating Temperature:  
-4°F- 122°F (-20°C-50°C)

Wiring:  
6' Lead Wire


Control:  
Primary (MLV)

LED Life:  
50,000 Hrs

Warranty:  
Housing Warranty: Lifetime; Finish Warranty:  
10 Years; LED Warranty: 10 Years

Installation Requirements:  
Remote low voltage power supply/transformer  
required

LED Engine:  
Lumens: 191 / CRI: 80+

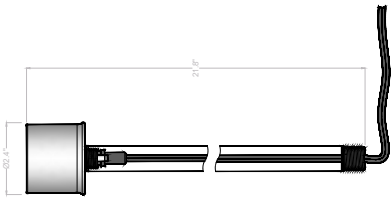

\* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:


Date:

Completed #:


E.G. Completed Order #:

# Brass ADJ Beam Deco Path

## Product Line Drawings

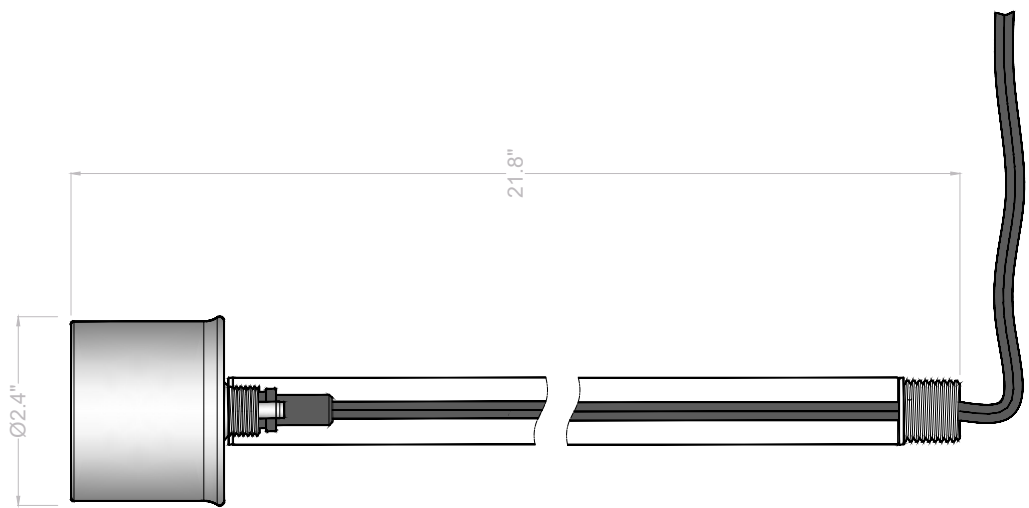

## Standard Included Accessories



1/2" Threaded 8" Stake  
with ADJ Collar

\* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.



Project Name:

Fixture Type:



Date:

Completed #:

E.G. Completed Order #:

Ordering Guide Continued

Instructions: Steps 7-10 continue on the following pages. Please complete the full ordering guide.

| 06 Top Accessories                                                                |                                                                          | Finish                                                                           |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------|----------------------------------------------------------------------------------|
| <div></div>                                                                       |                                                                          | <div></div>                                                                      |
|   | <div><div>BDCO-CAP-042</div><div>Deco Path Rounded Hat</div></div>       | <div>A Antique</div> <div>MB Midnight Bronze only available in 040 and 042</div> |
|  | <div><div>BDCO-CAP-041</div><div>Deco Path Flat Top Dome Hat</div></div> |                                                                                  |
|   | <div><div>BDCO-CAP-040</div><div>Deco Path Triangular Hat</div></div>    |                                                                                  |
|  | <div><div>BDCO-CAP-039</div><div>Deco Path 2-Tiered Hat</div></div>      |                                                                                  |
|   | <div><div>BDCO-CAP-038</div><div>Deco Uplight Threaded Cap</div></div>   |                                                                                  |

\* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Ordering Guide Continued

Instructions: Steps 8-10 continue on the following pages. Please complete the full ordering guide.

07 Mounts



**SSSD-STK-12-002**  
1/2" Threaded 12" Trident Stake with 5" Plate



**PSD-STK-15-005**  
1/2" Threaded 15" Commercial Stake



**SSSD-STK-6-007**  
1/2" Threaded 6" Trident Stake with 3" Plate



**SSSD-STK-6-003**  
1/2" Threaded 6" Mini Stake



**SSSD-STK-6-002**  
1/2" Threaded 6" Trident Stake with 5" Plate




**PSD-STK-12-001**  
1/2" Threaded 12" Stake



**BSD-MNT-207L-(A/MB)**  
1/2" Canopy Mount with 5" Diameter Plate



**BSD-MNT-207M-(A/MB)**  
1/2" Canopy Mount with 3.5" Diameter Plate



**BSD-MNT-207S-(A/MB)**  
1/2" Canopy Mount with 2" Diameter Plate

\* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Ordering Guide Continued

Instructions: Steps 9–10 continue on the following pages. Please complete the full ordering guide.

08 Secondary Mounts

|                                                                                  |                                                                          |                                                                                   |                                                                          |
|----------------------------------------------------------------------------------|--------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------|
|                                                                                  |                                                                          |                                                                                   |                                                                          |
|  | <div><div>BSD-STM-4-058-A</div><div>1/2" Threaded 4" Riser</div></div>   |  | <div><div>BSD-STM-24-053-A</div><div>1/2" Threaded 24" Riser</div></div> |
|  | <div><div>BSD-STM-16-052-A</div><div>1/2" Threaded 16" Riser</div></div> |  | <div><div>BSD-STM-8-051-A</div><div>1/2" Threaded 8" Riser</div></div>   |

\* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Ordering Guide Continued

09 Accessories

|                                                                                     |                                                                             |                                                                                     |                                                                            |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------|
|    | <b>REPL-003-8W-27K-A</b><br>8W Deco Path Replacement Module/Shroud          |    | <b>REPL-003-7W-TW-A</b><br>7W TW Deco Path Replacement Module/Shroud       |
|    | <b>REPL-003-7W-RGBTW-BK</b><br>7W RGBTW Deco Path Replacement Module/Shroud |    | <b>REPL-003-7W-RGBTW-A</b><br>7W RGBTW Deco Path Replacement Module/Shroud |
|    | <b>REPL-003-4W-30K-A</b><br>4W Deco Path Replacement Module/Shroud          |    | <b>REPL-003-8W-30K-A</b><br>8W Deco Path Replacement Module/Shroud         |
|  | <b>REPL-003-4W-27K-A</b><br>4W Deco Path Replacement Module/Shroud          |  | <b>BSDQC-ADP-163-(A/MB)</b><br>Bollard Adapter, 1/2" to QC                 |

10 Power

\* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:


Completed #:

E.G. Completed Order #:


Performance Characteristics & Beam Spread Charts

|                            |           |
|----------------------------|-----------|
| Input Power                | 4W        |
| Color Temperature (CCT)    | 30K       |
| Color Rendering Index (Ra) | 80+       |
| Beam Angle                 | 60        |
| Max. Candlepower           | 74.2 cd   |
| Delivered Lumens           | 71 lm     |
| Efficacy                   | 18.8 lm/W |

POLAR GRAPH - INTENSITY



CONE OF LIGHT - ILLUMINANCE

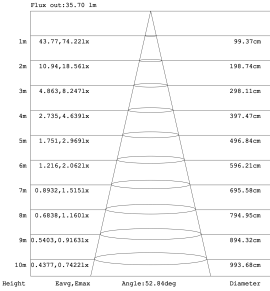

\* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

LED Engine Characteristics

| LED Engine   | Beam Spread | CCT (K) | CRI | Input Power (W) | RGB | Control         | VA   | Multiplier for 30K | Delivered Lumens (Lm)                     |
|--------------|-------------|---------|-----|-----------------|-----|-----------------|------|--------------------|-------------------------------------------|
| I1-A6A1-A6B1 | 120         | 27K     | 80+ | 4W              | No  | Primary (MLV)   | 5.2  |                    | 191                                       |
| I2-A6A1-A6B1 | 60          | 27K     | 80+ | 4W              | No  | Primary (MLV)   | 5.2  |                    | 69                                        |
| I5-A6B1      | 120         | 27K     | 80+ | 8W              | No  | Primary (MLV)   | 10.8 |                    | 361                                       |
| I6-A6B1      | 60          | 27K     | 80+ | 8W              | No  | Primary (MLV)   | 10.8 |                    | 122                                       |
| I-A7B1       | 60          | 27K-57K | 80+ | 7W              | No  | With PRO Remote | 9.6  |                    | 82-98                                     |
| I-A7B1       | 120         | 27K-57K | 80+ | 7W              | No  | With PRO Remote | 9.7  |                    | 234-286                                   |
| I3-A6A1-A6B1 | 120         | 30K     | 80+ | 4W              | No  | Primary (MLV)   | 5.7  |                    | 217                                       |
| I4-A6A1-A6B1 | 60          | 30K     | 80+ | 4W              | No  | Primary (MLV)   | 5.7  |                    | 71                                        |
| I7-A6B1      | 120         | 30K     | 80+ | 8W              | No  | Primary (MLV)   | 11.3 |                    | 374                                       |
| I8-A6B1      | 60          | 30K     | 80+ | 8W              | No  | Primary (MLV)   | 11.3 |                    | 123                                       |
| I-RGB-A9A1   | 120         | 27K-57K | 80+ | 7W              | Yes | With PRO Remote | 9.5  |                    | 27K-57K: 188-222<br>R: 107, G: 238, B: 72 |
| I-RGB-A9A1   | 60          | 27K-57K | 80+ | 7W              | Yes | With PRO Remote | 9.5  |                    | 27K-57K: 61-72<br>R: 34, G: 77, B: 24     |

\* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.