

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Brass Deco Uplight

Directional, Integrated Modular Variable, Brass, Deco Brass Series Uplight (Includes 15°, 40°, 60° Optics), Available in Multiple Variations, 10-15V



FINISHES



Antique

SPECIFICATIONS

Electrical / Power:
10W / 9.9 VA / 10-15V

Weight:
2.72 lb

Construction / Body:
Brass

Dimming:
25%-100%

Lens / Gaskets:
15°, 40°, 60° Lenses Included

Ambient Operating Temperature:
-4°F- 122°F (-20°C-50°C)

Wiring:
6' Lead Wire


Control:
Primary (MLV/ELV)

LED Life:
50,000 Hrs

Warranty:
Housing Warranty: Lifetime; Finish Warranty: 10 Years; LED Warranty: 10 Years

Installation Requirements:
Remote low voltage power supply/transformer required

LED Engine:
Lumens: 703 / CRI: 80+

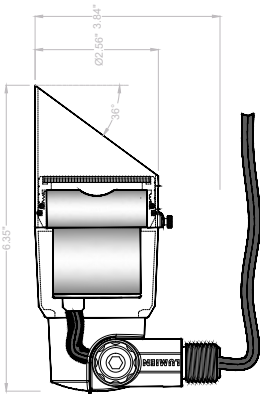

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.



Project Name:

Fixture Type:


Date:

Completed #:

E.G. Completed Order #:

Brass Deco Uplight

Product Line Drawings

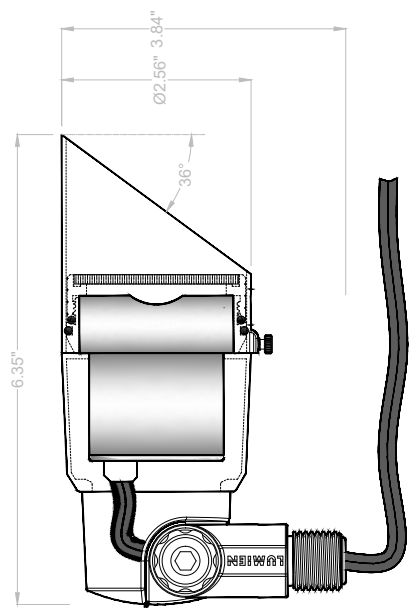

Standard Included Accessories



* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:


Completed #:

E.G. Completed Order #:

Ordering Guide Continued

Instructions: Steps 8–10 continue on the following pages. Please complete the full ordering guide.

07 Mounts

	SSD-MNT-021-(BK/BZ) 1/2" Threaded Gutter Mount Bracket		SSSD-MNT-005-BK 1/2" Threaded Tree Mount, 1.5" X 4"
	SSSD-MNT-005XL-BK 1/2" Threaded Tree Mount, 2.5" X 6"		SSSD-STK-12-002 1/2" Threaded 12" Trident Stake with 5" Plate
	PSD-STK-15-005 1/2" Threaded 15" Commercial Stake		BSD-MNT-001-A 1/2" Threaded Single Point Tree Mount
	BSD-MNT-002-A 1/2" Threaded Tree Mount Bracket		SSSD-STK-6-007 1/2" Threaded 6" Trident Stake with 3" Plate
	SSSD-STK-6-003 1/2" Threaded 6" Mini Stake		SSSD-STK-6-002 1/2" Threaded 6" Trident Stake with 5" Plate
	PSD-STK-12-001 1/2" Threaded 12" Stake		BSD-STK-SUB-188-A 1/2" Threaded Sub-Grade ADJ Riser, 1-12"
	BSD-MNT-207L-(A/MB) 1/2" Canopy Mount with 5" Diameter Plate		BSD-MNT-207M-(A/MB) 1/2" Canopy Mount with 3.5" Diameter Plate
	BSD-MNT-207S-(A/MB) 1/2" Canopy Mount with 2" Diameter Plate		

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Ordering Guide Continued

Instructions: Steps 9–10 continue on the following pages. Please complete the full ordering guide.

08 Secondary Mounts

	BSD-MNT-050-A 1/2" Threaded T-Mount		BSD-MNT-049-A 1/2" Threaded L-Mount
	BSD-STM-4-058-A 1/2" Threaded 4" Riser		BSD-STM-24-053-A 1/2" Threaded 24" Riser
	BSD-STM-16-052-A 1/2" Threaded 16" Riser		BSD-STM-8-051-A 1/2" Threaded 8" Riser

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:


E.G. Completed Order #:

Ordering Guide Continued

09 Accessories

	REPL-036-5W-30K 5W Deco Directional Replacement Module		REPL-036-5W-27K 5W Deco Directional Replacement Module
	REPL-036-10W-TW 10W TW Deco Directional Replacement Module		REPL-036-10W-RGBTW 10W RGBTW Deco Directional Replacement Module
	REPL-036-10W-30K 10W Deco Directional Replacement Module		REPL-036-10W-27K 10W Deco Directional Replacement Module

10 Power



* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:


Completed #:

E.G. Completed Order #:


Performance Characteristics & Beam Spread Charts

Input Power	5W
Color Temperature (CCT)	30K
Color Rendering Index (Ra)	80+
Beam Angle	40
Max. Candlepower	1,048.0 cd
Delivered Lumens	365 lm
Efficacy	79.1lm/W

POLAR GRAPH - INTENSITY



CONE OF LIGHT - ILLUMINANCE



* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

LED Engine Characteristics

LED Engine	Beam Spread	CCT (K)	CRI	Input Power (W)	RGB	Control	VA	Multiplier for 30K	Delivered Lumens (Lm)
I1-D6B1	40	27K	80+	5W	No	Primary (MLV/ELV)	5.1		380
I3-D6B1	40	27K	80+	10W	No	Primary (MLV/ELV)	9.9		703
I-D7B1	40	27K-57K	80+	10W	No	With PRO Remote	13.5		513-601
I2-D6B1	40	30K	80+	5W	No	Primary (MLV/ELV)	5.1		365
I4-D6B1	40	30K	80+	10W	No	Primary (MLV/ELV)	11.1		682
I4-D6B1	40	30K	80+	10W	No	Primary (MLV/ELV)	9.9		682
I-RGB-D9B1	40	27K-57K	80+	10W	Yes	With PRO Remote	13.5		27K-57K: 387-482 R: 158, G: 344, B: 70

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.