

Project Name: Fixture Type: Date:

Completed #: E.G. Completed Order #:

Brass Essential Micro Hooded Wall

Wall, Integrated Non-Modular, Brass, Recessed Hooded, 3.5W, 2700K (120 Lm) & 3000K (130 Lm), 10-15V



FINISHES



SPECIFICATIONS

Electrical / Power:
3.5W / 2.8 VA / 10-15V

Weight:
1.06 lb

Construction / Body:
Brass

Dimming:
25%-100%

Lens / Gaskets:
2 Rubber O-rings Included

Ambient Operating Temperature:
-4°F- 122°F (-20°C-50°C)

Wiring:
6' Lead Wire


Control:
Primary (MLV)

LED Life:
50,000 Hrs

Warranty:
Housing Warranty: Lifetime; Finish Warranty: 10 Years; LED Warranty: 10 Years

Installation Requirements:
Remote low voltage power supply/transformer required

LED Engine:
Lumens: 120 / CRI: 80+

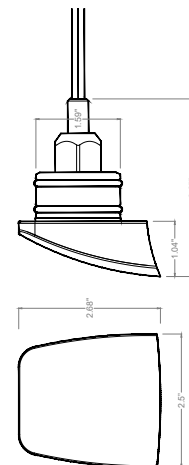

IP65

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:


Date:

Completed #:

E.G. Completed Order #:

Brass Essential Micro Hooded Wall

Product Line Drawings

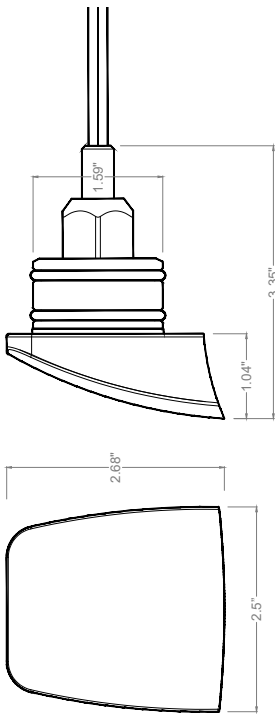


Standard Included Accessories



QC 6' Wire Lead



QC Lock Screw



(2) Micro O-ring

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Ordering Guide

Instructions: Steps 6–10 continue on the following pages. Please complete the full ordering guide.

01 LED Engine	02 Wattage	03 CCT	04 Spread	05 Finish
	-	-	-	-
W3B1 CORE Series	3.5W	27K 30K		A

Project Name:

Fixture Type:

Date:


Completed #:

E.G. Completed Order #:


Performance Characteristics & Beam Spread Charts

Input Power	3.5W
Color Temperature (CCT)	30K
Color Rendering Index (Ra)	80+
Beam Angle	75°
Max. Candlepower	89.2 cd
Delivered Lumens	130 lm
Efficacy	51.8 lm/W

POLAR GRAPH - INTENSITY



CONE OF LIGHT - ILLUMINANCE



* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

LED Engine Characteristics

LED Engine	Beam Spread	CCT (K)	CRI	Input Power (W)	RGB	Control	VA	Multiplier for 30K	Delivered Lumens (Lm)
I1-W3B1	75°	27K	80+	3.5W	No	Primary (MLV)	2.8		120
I2-W3B1	75°	30K	80+	3.5W	No	Primary (MLV)	2.9		130

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.