

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Brass Macro Module

Macro, Integrated Modular, Brass, Compatible with Brass Quick Connect Series, 10W, Available in Multiple Variations, 10-15V



FINISHES



Antique

SPECIFICATIONS

Electrical / Power:
10W / 10.2 VA / 10-15V

Weight:
1.71 lb

Construction / Body:
Brass

Dimming:
10%-100%

Lens / Gaskets:
Rubber Gasket Included

Ambient Operating Temperature:
-4°F- 122°F (-20°C-50°C)

Wiring:
6' Lead Wire


Control:
Primary (MLV/ELV)

LED Life:
50,000 Hrs

Warranty:
Housing Warranty: Lifetime; Finish Warranty:
10 Years; LED Warranty: 10 Years

Installation Requirements:
Remote low voltage power supply/transformer
required

LED Engine:
Lumens: 761 / CRI: 80+



* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:


Date:

Completed #:


E.G. Completed Order #:

Brass Macro Module

Product Line Drawings

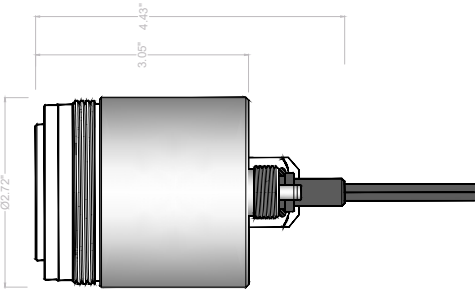

Standard Included Accessories



* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Ordering Guide

Instructions: Steps 6–10 continue on the following pages. Please complete the full ordering guide.

LumienLighting.com
REV 09042026

Project Name:

Fixture Type:

Date:


Completed #:

E.G. Completed Order #:


Performance Characteristics & Beam Spread Charts

Input Power	10W
Color Temperature (CCT)	30K
Color Rendering Index (Ra)	80+
Beam Angle	40
Max. Candlepower	1,926.0 cd
Delivered Lumens	786 lm
Efficacy	80.9 lm/W

POLAR GRAPH - INTENSITY



CONE OF LIGHT - ILLUMINANCE



* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

LED Engine Characteristics

LED Engine	Beam Spread	CCT (K)	CRI	Input Power (W)	RGB	Control	VA	Multiplier for 30K	Delivered Lumens (Lm)
I1-Z0B1	40°		80+	10W	No	With PRO Remote	13.7		205
I1-Z4B1	40	27K	80+	10W	No	Primary (MLV/ELV)	10.2		761
I-Z7B1	40	27K-57K	80+	10W	No	With PRO Remote	13.9		599-614
I2-Z4B1	40	30K	80+	10W	No	Primary (MLV/ELV)	10.5		786
I-RGB-Z9B1	40	27K-57K	80+	10W	Yes	With PRO Remote	14.3		27K-57K: 426-562 R: 210, G: 385, B: 76

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.