

Project Name: Fixture Type: Date:

Completed #: E.G. Completed Order #:

Brass Mega Uplight

Directional, Integrated Modular Variable, Brass - Antique, Mega Brass Series Uplight, Includes 40° Optics (20° Optics Available, Order Separately), 23W, Available in Multiple Variations, 10-15V



FINISHES



SPECIFICATIONS

Electrical / Power:

23W / 29.2 VA / 10-15V

Weight:

7.82 lb

Construction / Body:

Brass

Dimming:

0%-100%

Lens / Gaskets:

15°, 40°, 60° Lenses Included

Ambient Operating Temperature:

-4°F- 122°F (-20°C-50°C)

Wiring:

6' Lead Wire

Control:

With PRO Remote

LED Life:

50,000 Hrs

Warranty:


Housing Warranty: Lifetime; Finish Warranty: 10 Years; LED Warranty: 10 Years

Installation Requirements:

Remote low voltage power supply/transformer required

LED Engine:

Lumens: 1764 / CRI: 80+

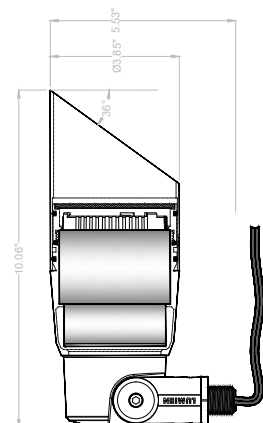

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.



IP65

Project Name:

Fixture Type:


Date:

Completed #:

E.G. Completed Order #:

Brass Mega Uplight


Product Line Drawings

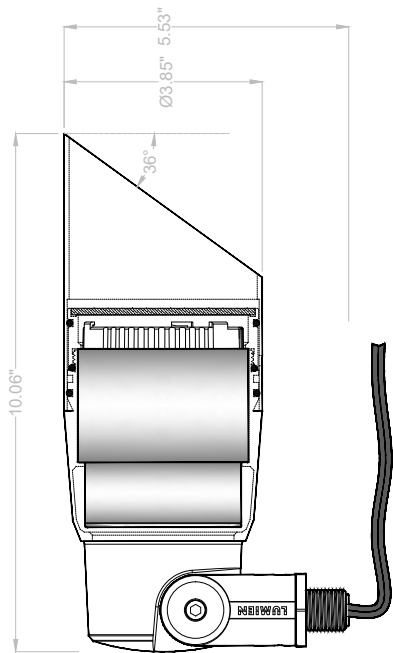

Standard Included Accessories



1/2" Threaded 8" Stake
with ADJ Collar



Mega, 40° Optic Lens

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:


Completed #:

E.G. Completed Order #:

Ordering Guide Continued

Instructions: Steps 8–10 continue on the following pages. Please complete the full ordering guide.

07 Mounts

	SSSD-STK-6-002 1/2" Threaded 6" Trident Stake with 5" Plate		PSD-STK-12-001 1/2" Threaded 12" Stake
	SSSD-MNT-005XL-BK 1/2" Threaded Tree Mount, 2.5" X 6"		SSSD-MNT-005-BK 1/2" Threaded Tree Mount, 1.5" X 4"
	SSSD-STK-12-002 1/2" Threaded 12" Trident Stake with 5" Plate		PSD-STK-15-005 1/2" Threaded 15" Commercial Stake
	BSD-MNT-207M-(A/MB) 1/2" Canopy Mount with 3.5" Diameter Plate		BSD-MNT-207S-(A/MB) 1/2" Canopy Mount with 2" Diameter Plate

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Ordering Guide Continued

Instructions: Steps 9–10 continue on the following pages. Please complete the full ordering guide.

08 Secondary Mounts

	BSD-MNT-050-A 1/2" Threaded T-Mount		BSD-MNT-049-A 1/2" Threaded L-Mount
	BSD-STM-4-058-A 1/2" Threaded 4" Riser		BSD-STM-24-053-A 1/2" Threaded 24" Riser
	BSD-STM-16-052-A 1/2" Threaded 16" Riser		BSD-STM-8-051-A 1/2" Threaded 8" Riser

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Ordering Guide Continued

09 Accessories



PMGA-OPT-20-019
Mega, 20° Optic Lens

10 Power

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Performance Characteristics & Beam Spread Charts

POLAR GRAPH - INTENSITY

CONE OF LIGHT - ILLUMINANCE

Input Power	23W
Color Temperature (CCT)	27K-57K
Color Rendering Index (Ra)	80+
Beam Angle	40
Max. Candlepower	4,516.0 cd
Delivered Lumens	1473 lm
Efficacy	65.3 lm/W

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

