

Project Name:

Fixture Type:

Date:

Completed #:


E.G. Completed Order #:

Brass Micro Module


Micro, Integrated Modular, Brass, Compatible with Brass Micro Drop In & Brass Quick Connect Series, Available in Multiple Variations (Includes Turtle Safe Module), 10-15V



FINISHES



Antique



Raw

SPECIFICATIONS

Electrical / Power:
3.5W / 5.0 VA / 10-15V

Weight:
0.50 lb

Construction / Body:
Brass

Dimming:
25%-100%

Lens / Gaskets:
2 Rubber O-rings Included

Ambient Operating Temperature:
-4°F- 122°F (-20°C-50°C)

Wiring:
6' Lead Wire


Control:
Primary (MLV/ELV)

LED Life:
50,000 Hrs

Warranty:
Housing Warranty: Lifetime; Finish Warranty: 10 Years; LED Warranty: 10 Years

Installation Requirements:
Remote low voltage power supply/transformer required

LED Engine:
Lumens: 315 / CRI: 80+



* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:


Date:

Completed #:

E.G. Completed Order #:

Brass Micro Module

Product Line Drawings

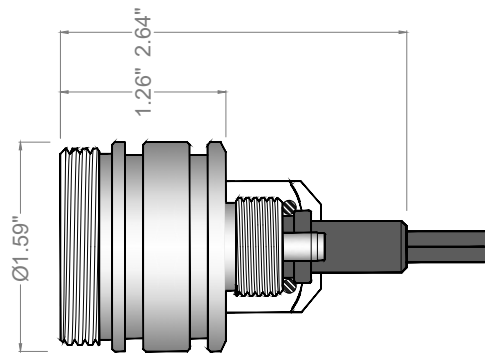

Standard Included Accessories



* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Ordering Guide

Instructions: Steps 6–10 continue on the following pages. Please complete the full ordering guide.

01 LED Engine	02 Wattage	03 CCT	04 Spread	05 Finish
M4B1 Micro, CORE Series	3.5W 5.5W	27K 30K	40 60	A R(only available in 5.5W 40°)
M7B1 Micro, PROTW Series	4.5W	27K-57K	15 40 60	A MB(only available in 40°)
M8B1 Micro, PRORGBW Series	3W	27K 30K	40.0	A MB
M0B1 Micro Turtle Safe, PROdim Series	4.5W	AMBR		A

Performance Characteristics & Beam Spread Charts

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

LED Engine Characteristics

LED Engine	Beam Spread	CCT (K)	CRI	Input Power (W)	RGB	Control	VA	Multiplier for 30K	Delivered Lumens (Lm)
I1-M0B1	40°		80+	4.5W	No	With PRO Remote	6.9		160
I1-M4A1-M4B1	40	27K	80+	3.5W	No	Primary (MLV/ELV)	5.0		315
I3-M4A1-M4B1	60	27K	80+	3.5W	No	Primary (MLV/ELV)	5.8		317
I5-M4A1-M4B1	40	27K	80+	5.5W	No	Primary (MLV/ELV)	8.3		427
I7-M4A1-M4B1	60	27K	80+	5.5W	No	Primary (MLV/ELV)	8.6		420
I-M7A1-M7B1	40	27K-57K	80+	4.5W	No	With PRO Remote	5.5		290-351
I-M7B1	15	27K-57K	80+	4.5W	No	With PRO Remote	6.5		321-351
I-M7B1	60	27K-57K	80+	4.5W	No	With PRO Remote	6.6		283-316
I0-M7B1	60	27K-57K	80+	4.5W	No	With PRO Remote	6.6		283-316
I2-M4A1-M4B1	40	30K	80+	3.5W	No	Primary (MLV/ELV)	5.2		326
I4-M4A1-M4B1	60	30K	80+	3.5W	No	Primary (MLV/ELV)	5.2		325
I6-M4A1-M4B1	40	30K	80+	5.5W	No	Primary (MLV/ELV)	8.5		472
I8-M4A1-M4B1	60	30K	80+	5.5W	No	Primary (MLV/ELV)	8.4		434
I-RGB-M8A1	40	27K	80+	3W	Yes	With PRO Remote	4.0		27K: 129 R: 56, G: 144, B: 43
I-RGB-M8A1	40	30K	80+	3W	Yes	With PRO Remote	4.8		30K: 141 R: 59, G: 143, B: 44

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.