

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Brass Micro Shell Enclosure

Step, Integrated Modular, Brass - Antique, Shell Enclosure, 5.5W, 2700K (311 Lm) & 3000K (319 Lm), 10-15V




FINISHES



SPECIFICATIONS

Electrical / Power: 5.5W / 8.5 VA / 10-15V	Weight: 3.20 lb
Construction / Body: Brass	Dimming: 25%-100%
Lens / Gaskets:	Ambient Operating Temperature: -4°F- 122°F (-20°C-50°C)
Wiring: 6' Lead Wire	Control: Primary (MLV/ELV)
LED Life: 50,000 Hrs	Warranty: Housing Warranty: Lifetime; Finish Warranty: 10 Years; LED Warranty: 10 Years
Installation Requirements: Remote low voltage power supply/transformer required	LED Engine: Lumens: 311 / CRI: 80+

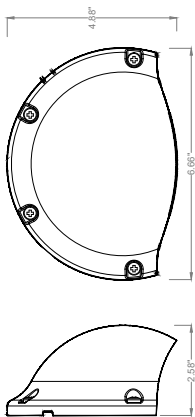

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.



Project Name:

Fixture Type:


Date:

Completed #:

E.G. Completed Order #:

Brass Micro Shell Enclosure

Product Line Drawings

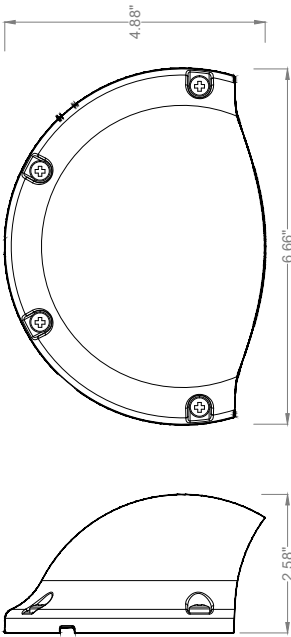

Standard Included Accessories

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Ordering Guide

Instructions: Steps 6–10 continue on the following pages. Please complete the full ordering guide.

01 LED Engine	02 Wattage	03 CCT	04 Spread	05 Finish
	-	-	-	-
M4B7 CORE Series	5.5W	27K 30K		


Project Name: Fixture Type: Date:

Completed #: E.G. Completed Order #:


Performance Characteristics & Beam Spread Charts

Input Power	5.5W
Color Temperature (CCT)	30K
Color Rendering Index (Ra)	80+
Beam Angle	40
Max. Candlepower	231.8 cd
Delivered Lumens	319 lm
Efficacy	58.2 lm/W

POLAR GRAPH - INTENSITY



CONE OF LIGHT - ILLUMINANCE



* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

LED Engine Characteristics

LED Engine	Beam Spread	CCT (K)	CRI	Input Power (W)	RGB	Control	VA	Multiplier for 30K	Delivered Lumens (Lm)
I1-M4B7	40	27K	80+	5.5W	No	Primary (MLV/ELV)	8.5		311
I2-M4B7	40	30K	80+	5.5W	No	Primary (MLV/ELV)	8.6		319

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.