

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Brass Nano Knuckle Module

Nano, Integrated Modular, Brass, Knuckle, Available in Multiple Variations, 10-15V



FINISHES



Antique

SPECIFICATIONS

Electrical / Power:
3W / 4.1 VA / 10-15V

Weight:
0.69 lb

Construction / Body:
Brass

Dimming:
25%-100%

Lens / Gaskets:

Ambient Operating Temperature:
-4°F- 122°F (-20°C-50°C)

Wiring:
6' Lead Wire


Control:
Primary (MLV/ELV)

LED Life:
50,000 Hrs

Warranty:
Housing Warranty: Lifetime; Finish Warranty:
10 Years; LED Warranty: 10 Years

Installation Requirements:
Remote low voltage power supply/transformer
required

LED Engine:
Lumens: 167 / CRI: 80+



* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.



Project Name:

Fixture Type:


Date:

Completed #:

E.G. Completed Order #:

Brass Nano Knuckle Module

Product Line Drawings

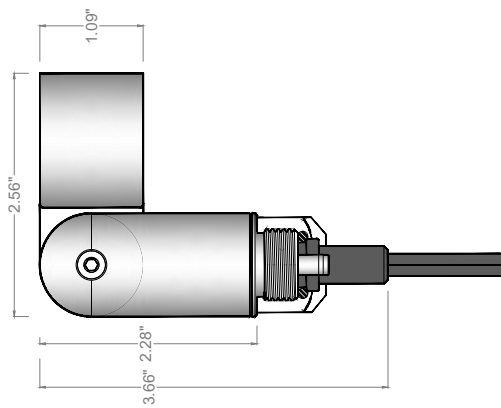

Standard Included Accessories



* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Ordering Guide

Instructions: Steps 6–10 continue on the following pages. Please complete the full ordering guide.

LumienLighting.com
REV 09042026

Project Name:

Fixture Type:

Date:


Completed #:

E.G. Completed Order #:


Performance Characteristics & Beam Spread Charts

Input Power	3W
Color Temperature (CCT)	30K
Color Rendering Index (Ra)	80+
Beam Angle	30
Max. Candlepower	479.4 cd
Delivered Lumens	263 lm
Efficacy	91.2 lm/W

POLAR GRAPH - INTENSITY



CONE OF LIGHT - ILLUMINANCE



* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

LED Engine Characteristics

LED Engine	Beam Spread	CCT (K)	CRI	Input Power (W)	RGB	Control	VA	Multiplier for 30K	Delivered Lumens (Lm)
I1-N4B3	15	27K	80+	3W	No	Primary (MLV/ELV)	4.1		167
I3-N4B3	30	27K	80+	3W	No	Primary (MLV/ELV)	4.3		236
I-N7B3	30	27K-57K	80+	3W	No	With PRO Remote	4.4		131-146
I2-N4B3	15	30K	80+	3W	No	Primary (MLV/ELV)	4.2		183
I4-N4B3	30	30K	80+	3W	No	Primary (MLV/ELV)	4.6		263
I-RGB-N8B3	30	27K	80+	3W	Yes	With PRO Remote	4.8		27K: 104 R: 26, G: 117, B: 39
I-RGB-N8B3	30	30K	80+	3W	Yes	With PRO Remote	4.9		30K: 104 R: 37, G: 109, B: 36

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.