

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Brass Nano Module

Nano, Integrated Modular, Brass, Compatible with Brass Quick Connect Series, 1.95in, Available in Multiple Variations, 10-15V



FINISHES



Antique

SPECIFICATIONS

Electrical / Power:
1.5W / 2.2 VA / 10-15V

Weight:
0.42 lb

Construction / Body:
Brass

Dimming:
25%-100%

Lens / Gaskets:

Ambient Operating Temperature:
-4°F- 122°F (-20°C-50°C)

Wiring:
6' Lead Wire


Control:
Primary (MLV/ELV)

LED Life:
50,000 Hrs

Warranty:
Housing Warranty: Lifetime; Finish Warranty:
10 Years; LED Warranty: 10 Years

Installation Requirements:
Remote low voltage power supply/transformer
required

LED Engine:
Lumens: 100 / CRI: 80+



* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:


Date:

Completed #:


E.G. Completed Order #:

Brass Nano Module

Product Line Drawings

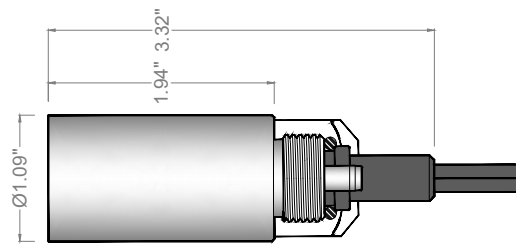

Standard Included Accessories



* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Ordering Guide

Instructions: Steps 6–10 continue on the following pages. Please complete the full ordering guide.

LumienLighting.com
REV 09042026

Project Name:

Fixture Type:

Date:


Completed #:

E.G. Completed Order #:


Performance Characteristics & Beam Spread Charts

Input Power	1.5W
Color Temperature (CCT)	30K
Color Rendering Index (Ra)	80+
Beam Angle	30
Max. Candlepower	274.5 cd
Delivered Lumens	148 lm
Efficacy	102.0 lm/W

POLAR GRAPH - INTENSITY



CONE OF LIGHT - ILLUMINANCE



* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

LED Engine Characteristics

LED Engine	Beam Spread	CCT (K)	CRI	Input Power (W)	RGB	Control	VA	Multiplier for 30K	Delivered Lumens (Lm)
I1-N4B1	15	27K	80+	1.5W	No	Primary (MLV/ELV)	2.2		100
I3-N4B1	30	27K	80+	1.5W	No	Primary (MLV/ELV)	2.4		140
I5-N4B1	15	27K	80+	2.5W	No	Primary (MLV/ELV)	3.9		162
I7-N4B1	30	27K	80+	2.5W	No	Primary (MLV/ELV)	3.9		217
I-N7B1	30	27K-57K	80+	2.5W	No	With PRO Remote	3.8		121-132
I2-N4B1	15	30K	80+	1.5W	No	Primary (MLV/ELV)	2.3		112
I4-N4B1	30	30K	80+	1.5W	No	Primary (MLV/ELV)	2.4		148
I6-N4B1	15	30K	80+	2.5W	No	Primary (MLV/ELV)	3.9		172
I8-N4B1	30	30K	80+	2.5W	No	Primary (MLV/ELV)	3.9		232
I-RGB-N8B1	30	27K	80+	2.5W	Yes	With PRO Remote	3.8		27K: 90 R: 28, G: 104, B: 33
I-RGB-N8B1	30	30K	80+	2.5W	Yes	With PRO Remote	3.8		30K: 93 R: 36, G: 100, B: 31

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.