


Project Name: Fixture Type: Date:

Completed #: E.G. Completed Order #:

Brass Select Hardscape

Wall, Integrated Modular, Brass, 6" Modular Hardscape, Available in Multiple Variations, 10-15V

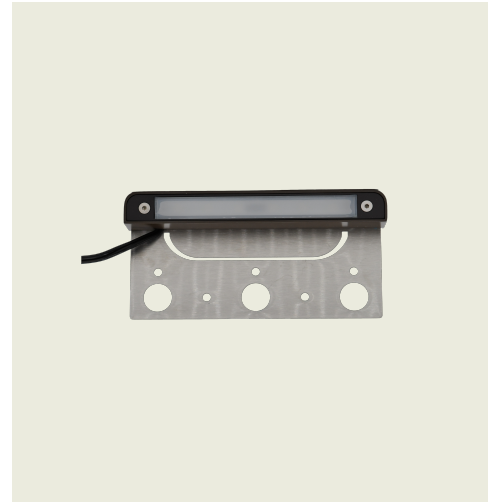

FINISHES



SPECIFICATIONS

Electrical / Power:
2.5W / 5.0 VA / 10-15V

Weight:
0.91 lb

Construction / Body:
Brass

Dimming:
0%-100%

Lens / Gaskets:

Ambient Operating Temperature:
-4°F- 122°F (-20°C-50°C)

Wiring:
6' Lead Wire


Control:
With PRO Remote

LED Life:
50,000 Hrs

Warranty:
Housing Warranty: Lifetime; Finish Warranty: 10 Years; LED Warranty: 10 Years

Installation Requirements:
Remote low voltage power supply/transformer required

LED Engine:
Lumens: 43 / CRI: 80+



IP65

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:


Date:

Completed #:

E.G. Completed Order #:

Brass Select Hardscape

Product Line Drawings

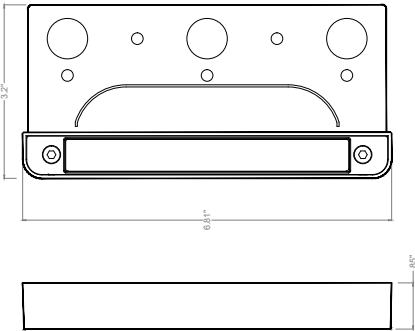

Standard Included Accessories



2.5mm Allen Key

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Ordering Guide Continued

Instructions: Steps 8–10 continue on the following pages. Please complete the full ordering guide.

07 Mounts



A-MNT-009-(BK/BZ)
Hardscape Surface-Mount Bracket

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Ordering Guide Continued

09 Accessories

	REPL-004-2.5W-RGBTW 2.5W RGBTW W4B4/W9B4 Hardscape Replacement Module		REPL-004-3W-30K 3W W4B4/W9B4 Hardscape Replacement Module
	REPL-004-3W-27K		

10 Power

	LP-REMOTE LumienPRO Remote
--	--------------------------------------

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:


Completed #:

E.G. Completed Order #:


Performance Characteristics & Beam Spread Charts

Input Power	3W
Color Temperature (CCT)	30K
Color Rendering Index (Ra)	80+
Beam Angle	115°
Max. Candlepower	44.4 cd
Delivered Lumens	122 lm
Efficacy	45.0 lm/W

POLAR GRAPH - INTENSITY



CONE OF LIGHT - ILLUMINANCE



* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

LED Engine Characteristics

LED Engine	Beam Spread	CCT (K)	CRI	Input Power (W)	RGB	Control	VA	Multiplier for 30K	Delivered Lumens (Lm)
I1-W4B4	115°	27K	80+	3W	No	Primary (MLV/ELV)	4.2		133
I2-W4B4	115°	30K	80+	3W	No	Primary (MLV/ELV)	4.4		122
I-RGB-W9B4	115°	27K-57K	80+	2.5W	Yes	With PRO Remote	5.0		27K-57K: 46-55 R: 16, G: 43, B: 6

* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.