

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Brass Select Twist-Lock Hooded Wall

Wall, Integrated Non-Modular, Brass, Surface Mount Hooded, 3.5W, 92 Lm, 2700K (91 Lm) & 3000K (94 Lm), 10-15V




FINISHES



Antique

SPECIFICATIONS

|                                                                                           |                                                                                                   |
|-------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
| <b>Electrical / Power:</b><br>2.5W / 2.9 VA / 10-15V                                      | <b>Weight:</b><br>0.80 lb                                                                         |
| <b>Construction / Body:</b><br>Brass                                                      | <b>Dimming:</b><br>25%-100%                                                                       |
| <b>Lens / Gaskets:</b>                                                                    | <b>Ambient Operating Temperature:</b><br>-4°F- 122°F (-20°C-50°C)                                 |
| <b>Wiring:</b><br>6' Lead Wire                                                            | <b>Control:</b><br>Primary (MLV/ELV)                                                              |
| <b>LED Life:</b><br>50,000 Hrs                                                            | <b>Warranty:</b><br>Housing Warranty: Lifetime; Finish Warranty: 10 Years; LED Warranty: 10 Years |
| <b>Installation Requirements:</b><br>Remote low voltage power supply/transformer required | <b>LED Engine:</b><br>Lumens: 91 / CRI: 80+                                                       |

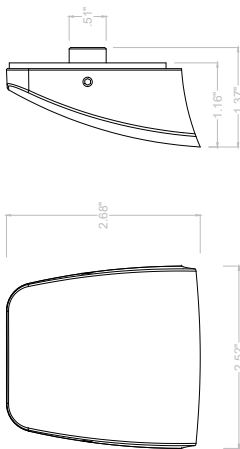

\* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:


Date:

Completed #:

E.G. Completed Order #:

Brass Select Twist-Lock Hooded Wall

Product Line Drawings

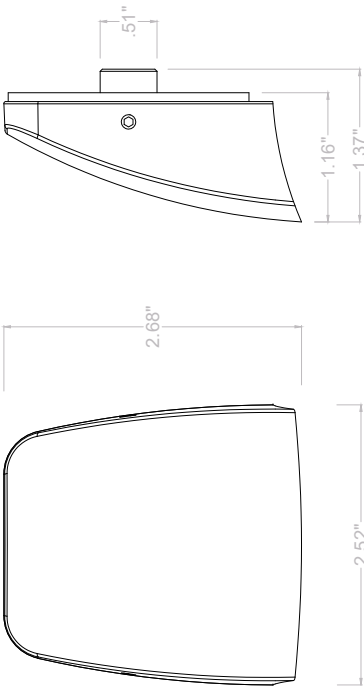

Standard Included Accessories



\* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

Ordering Guide

Instructions: Steps 6–10 continue on the following pages. Please complete the full ordering guide.

| 01 LED Engine       | 02 Wattage | 03 CCT     | 04 Spread | 05 Finish |
|---------------------|------------|------------|-----------|-----------|
|                     | -          | -          | -         | -         |
| W3B2<br>CORE Series | 2.5W       | 27K<br>30K |           | A         |

Project Name:

Fixture Type:

Date:


Completed #:

E.G. Completed Order #:


Performance Characteristics & Beam Spread Charts

|                            |           |
|----------------------------|-----------|
| Input Power                | 2.5W      |
| Color Temperature (CCT)    | 30K       |
| Color Rendering Index (Ra) | 80+       |
| Beam Angle                 | 75°       |
| Max. Candlepower           | 66.3 cd   |
| Delivered Lumens           | 94 lm     |
| Efficacy                   | 49.9 lm/W |

POLAR GRAPH - INTENSITY



CONE OF LIGHT - ILLUMINANCE



\* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.

Project Name:

Fixture Type:

Date:

Completed #:

E.G. Completed Order #:

LED Engine Characteristics

| LED Engine | Beam Spread | CCT (K) | CRI | Input Power (W) | RGB | Control           | VA  | Multiplier for 30K | Delivered Lumens (Lm) |
|------------|-------------|---------|-----|-----------------|-----|-------------------|-----|--------------------|-----------------------|
| I1-W3B2    | 75°         | 27K     | 80+ | 2.5W            | No  | Primary (MLV/ELV) | 2.9 |                    | 91                    |
| I2-W3B2    | 75°         | 30K     | 80+ | 2.5W            | No  | Primary (MLV/ELV) | 3.1 |                    | 94                    |

\* Product specifications, materials, and availability may change without notice. Actual fixtures may vary from the information shown.